


# LED Filament ST64 Dimmable


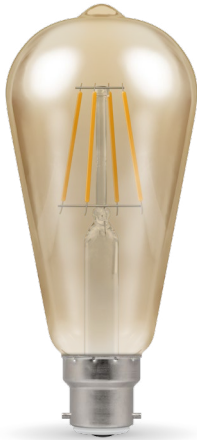


Energy saving LED ST64 replacement lamp featuring LED filament technology and antique bronzed coloured glass to closely resemble the look and feel of a traditional filament incandescent lamp.

- Available in 5W or 7.5W
- 5W = 15,000 hour life, 7,500 switching cycles
- 7.5W = 10,000 hour life, 5,000 switching cycles
- 2200K extra warm white
- Colour rendering index Ra≥80
- BC-B22d or ES-E27 cap
- Antique bronze finish
- Dimmable - DuoDim™ Technology compatible with both leading and trailing edge dimmers\*
- For indoor use only

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
<b>Single Carton</b>											
4221	5	240	BC-B22d	Extra Warm White	2200	410	35	64	138	A+	1
4238	5	240	ES-E27	Extra Warm White	2200	410	35	64	140	A+	1
4245	7.5	240	BC-B22d	Extra Warm White	2200	638	50	64	138	A+	1
4252	7.5	240	ES-E27	Extra Warm White	2200	638	50	64	140	A+	1

\* The lamp is compatible with most dimmer switches, please refer to following pages for up-to-date list of compatible dimmer switches.



BC-B22d Cap



ES-E27 Cap



7.5W



5W




Lighting brilliance since 1878



## 5W LED Filament ST64 Dimmable

Part Codes: 4221, 4238

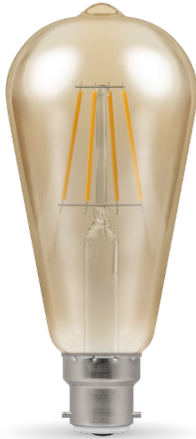

The below table is designed to help you choose a suitable dimmer switch for your Crompton Lamp dimmable product. Crompton Lamps have extensively tested the below dimmer switches to evaluate their dimming function and to make sure the dimmer switch meets our dimming compatibility standards.

All compatible dimmer switches may require low end trimming.

For guidelines on dimmer switches not listed below, or for more information please contact Crompton Lamps.

Manufacturer	Dimmer Model	Dimmer Wattage	Dimmer Type	Lamps Tested Per Circuit	Notes
Aurora	AU-DSP401	60W-400W	Leading	1-3	Steps from 0-30%
Aurora	AU-DSP651	75W-650W	Leading	1-3	Steps from 0-30%
Aurora	AU-DSP400X	60W-400W	LED	1-3	Does not dim below 5%
Danlers	DSS1D 250W	40W-250W	Leading	1-3	Steps from 0-30%
Danlers	DP1D 400WIET	60W-400W	Leading	1-3	Steps from 0-30%
Danlers	DPDLED	5W-250W	Leading	1-3	Steps from 0-30%
MK	K451 1xxxLV	40W-220W	Leading	1-3	Does not dim below 30%
MK	K1521WHILV	40W-300W	Leading	1-3	Does not dim below 50%
MK	K1524WHILV	40W-300W	Leading	1-3	Does not dim below 50%
Zano	ZANOMO500	11W-50W	Leading	1-3	Steps from 0-20%
Varilight	V-Pro JQP401W	10W-400W	Trailing	1-3	Does not dim below 40%
Varilight	V-Pro JQP252W	10W-250W	Trailing	1-3	Does not dim below 40%
Eaton	P9131	60W-250W	Leading	1-3	Steps from 0-40%

The below list of dimmer switches have also been tested by Crompton Lamps and do not meet our dimming compatibility standards. Crompton Lamps does not recommend the use of any of the below dimmer switches as they may cause lamp/dimmer failure.

Danlers: DSS1D 400W, DQDGEU400W

*Lighting brilliance since 1878*




Crompton Lamps Limited registered in England and Wales No. 05590551  
 Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE  
**Tel:** +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@cromptonlamps.com **Web:** www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice.  
 E. & O. E. © Crompton Lamps Limited 2018

# 7.5W LED Filament ST64 Dimmable

Part Codes: 4245, 4252

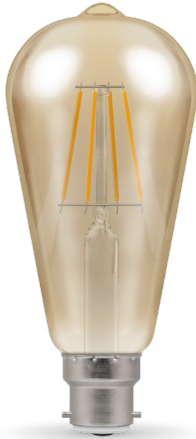

The below table is designed to help you choose a suitable dimmer switch for your Crompton Lamp dimmable product. Crompton Lamps have extensively tested the below dimmer switches to evaluate their dimming function and to make sure the dimmer switch meets our dimming compatibility standards.

All compatible dimmer switches may require low end trimming.

For guidelines on dimmer switches not listed below, or for more information please contact Crompton Lamps.

Manufacturer	Dimmer Model	Dimmer Wattage	Dimmer Type	Lamps Tested Per Circuit	Notes
Aurora	AU-DSP401	60W-400W	Leading	1-3	Steps from 0-40%
Aurora	AU-DSP651	75W-650W	Leading	1-3	Steps from 0-40%
Aurora	AU-DSP400X	60W-400W	LED	1-3	Flickers 0-20%
Danlers	DSS1D 250W	40W-250W	Leading	1-3	Steps from 0-40%
Danlers	DP1D 400WIET	60W-400W	Leading	1-3	Steps from 0-50%
Danlers	DPDLED	5W-250W	Leading	1-3	Steps from 0-30%
MK	K451 1xxxLV	40W-220W	Leading	1-3	Does not dim below 40%
MK	K1521WHILV	40W-300W	Leading	1-3	Does not dim below 50%
MK	K1524WHILV	40W-300W	Leading	1-3	Does not dim below 40%
Zano	ZANOMO500	11W-50W	Leading	1-3	Steps from 0-30%
Varilight	V-Pro JQP401W	10W-400W	Trailing	1-3	Does not dim below 30%
Varilight	V-Pro JQP252W	10W-250W	Trailing	1-3	Does not dim below 30%
Eaton	P9131	60W-250W	Leading	1-3	Steps from 0-40%

The below list of dimmer switches have also been tested by Crompton Lamps and do not meet our dimming compatibility standards. Crompton Lamps does not recommend the use of any of the below dimmer switches as they may cause lamp/dimmer failure.

Danlers: DSS1D 400W, DQDGDEU400W

*Lighting brilliance since 1878*



Crompton Lamps Limited registered in England and Wales No. 05590551  
 Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE  
**Tel:** +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@cromptonlamps.com **Web:** www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice.  
 E. & O. E. © Crompton Lamps Limited 2018